



Oil Viscosity Characteristics

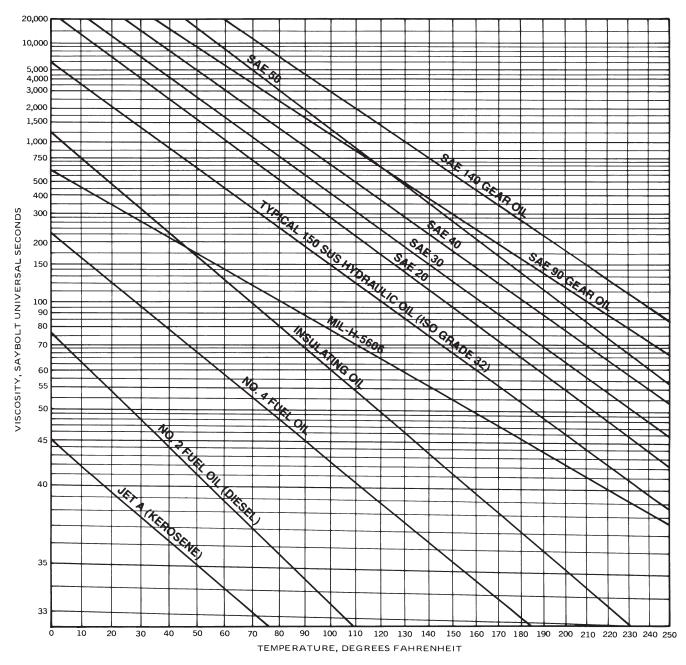

Reprinted by permission of the American Society for Testing and Materials, Copyright 1976

© 2010 Velcon Filters, LLC. 1533-R2 07/93

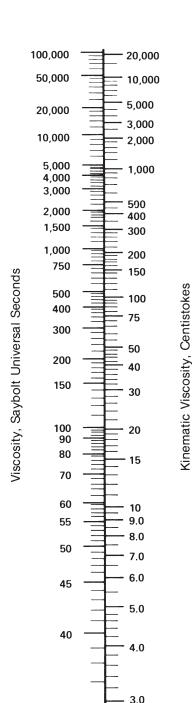

Centistokes to Saybolt Universal Seconds Conversion

To convert centistokes to Saybolt Universal Seconds, find the centistoke value on the table at left and then read across to find the equivalent value in Saybolt Universal Seconds.

EXAMPLE:

A viscosity of 30 centistokes is equivalent to 140 Saybolt Universal Seconds.

NOTES:

a) If the viscosity is given in centipoise (cp), it can be readily converted to centistokes (cs) by the formula:

- b) Centistokes are often designated by cSt.
- c) Saybolt Universal Seconds are designated by either SUS or SSU



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your LOCAL REPRESENTATIVE:

COMPANY HEADQUARTERS: Velcon Filters, LLC 1210 Garden of the Gods Road Colorado Springs, CO 80907-3410 Phone: 1.800.531.0180 / 1.719.531.5855 Fax: 719.531.5690 e-mail: vfsales@velcon.com www.velcon.com

MANUFACTURING PLANTS LOCATED AT: Colorado Springs, Colorado Sylacauga, Alabama

Henryetta, Oklahoma

OFFICES AND AFFILIATES IN:
Canada, Germany, Singapore, & Spain





Liquid Filtration and Separation Specialists